


Current Sensor

Product Series: STK-616E

Part number: STK-616E-20AB
STK-616E-30AB
STK-616E-35AB
STK-616E-65AB

Version: Ver 4.3

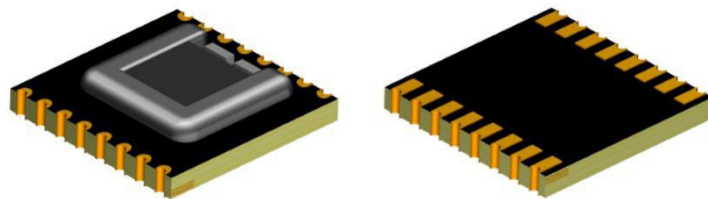

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description.....	2
2.	Electrical data.....	3
3.	Dimension & Pin definitions.....	4
4.	PCB Layout.....	5
5.	Working temperature vs Current.....	5
6.	Typical Application of STK-616E.....	6
7.	Frequency band width.....	7
8.	Response time & noise with typical circuit.....	7

1. Description

The STK-616E series current sensor is based on TMR (tunnel magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Solar energy
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 105
Storage temperature	T_stg	°C	-40 ~ 105
Mass	m	g	1

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	6
ESD rating (HBM)	U_ESD	kV	4

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	Ud	kV	4	
Impulse withstand voltage 1.2/50μs	Ūw	kV	6	
Clearance distance (pri. -sec)	dCl	mm	7.5	Determined by customer's layout
Creepage distance (pri. -sec)	dCp	mm	7.5	

Measuring current table


Product	Optimized Range	Sensitivity, (mV/A)	T(°C)
STK-616E-20AB	±20 A	100	-40 ~ 105
STK-616E-30AB	±30 A	66	-40 ~ 105
STK-616E-35AB	±30 A	38.5	-40 ~ 105
STK-616E-65AB	±30 A	30.75	-40 ~ 105

2. Electrical data


 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-20		20	STK-616E-20AB
			-30		30	STK-616E-30AB
			-35		35	STK-616E-35AB
			-65		65	STK-616E-65AB
Supply voltage	V_{CC}	V		5		+/-5%
Current consumption	I_{CC}	mA		5	10	
Primary Conductor Resistance	R_{IP}	m Ω		0.6		
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ I_P=0\text{A}$
Internal output resistance	R_{out}	Ω		1		V_{out}
Theoretical gain	G_{th}	mV/A		100		STK-616E-20AB
				66		STK-616E-30AB
				38.5		STK-616E-35AB
				30.75		STK-616E-65AB
Error of gain	Err_G	% G_{th}	-1		1	Trimmed in the factory @ 25°C Note 2)
Rated linearity error	Non-L	% I_{pn}		± 1		$\pm I_{pn}$
Step response time	t_{res}	μs		3.5	5	@90% of I_{pn}
Frequency bandwidth (-3dB)	BW	kHz		200		No RC circuit
Regulator PSRR		dB		50		From DC to 1kHz
Output voltage noise DC ~ 100 kHz @250 kHz Sampling Rate	V_{noise}	mVpp		20		STK-616E-20AB
Accuracy @ 25°C	X	% of I_{pn}		± 1		@ 25°C
Accuracy @ $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	X_{TRange}	% of I_{pn}	-3.5		3.5	$-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$


3. Dimension & Pin definitions

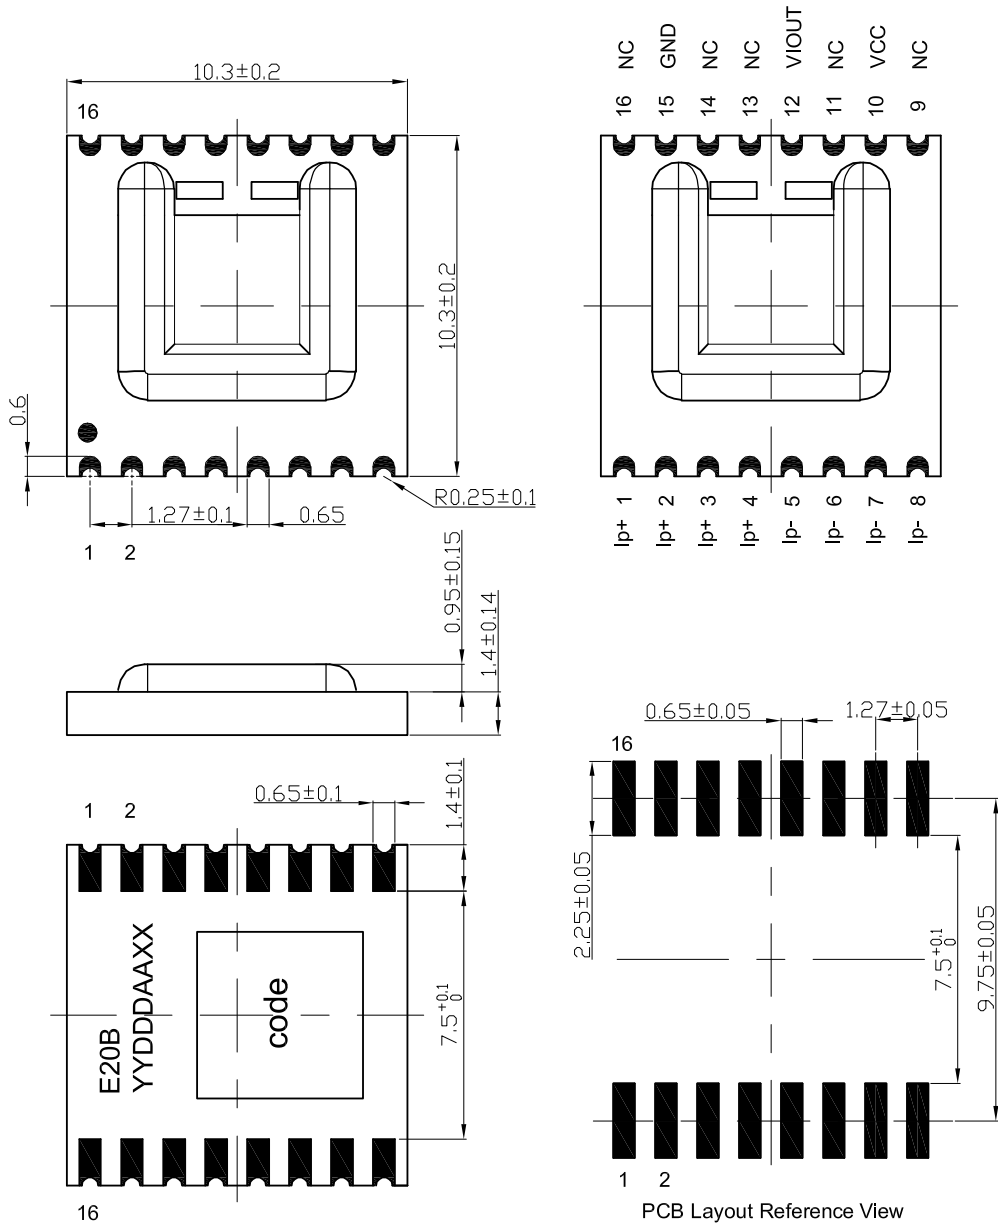


4. PCB Layout

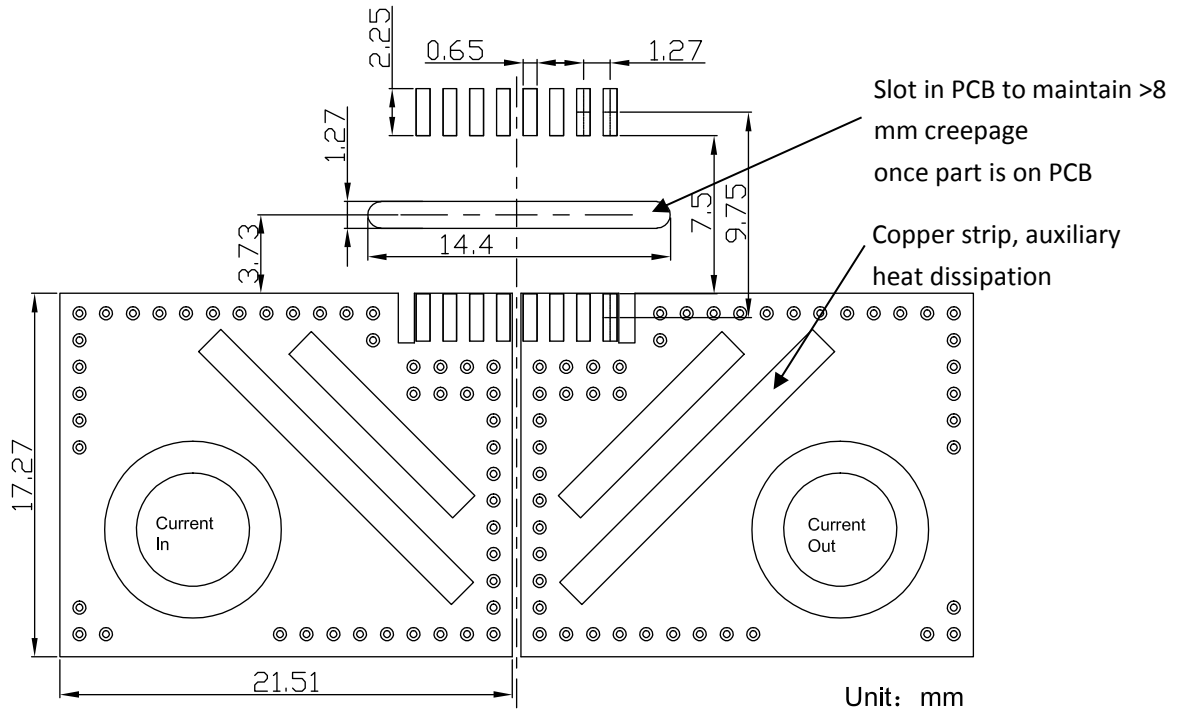

5. Working temperature vs Current

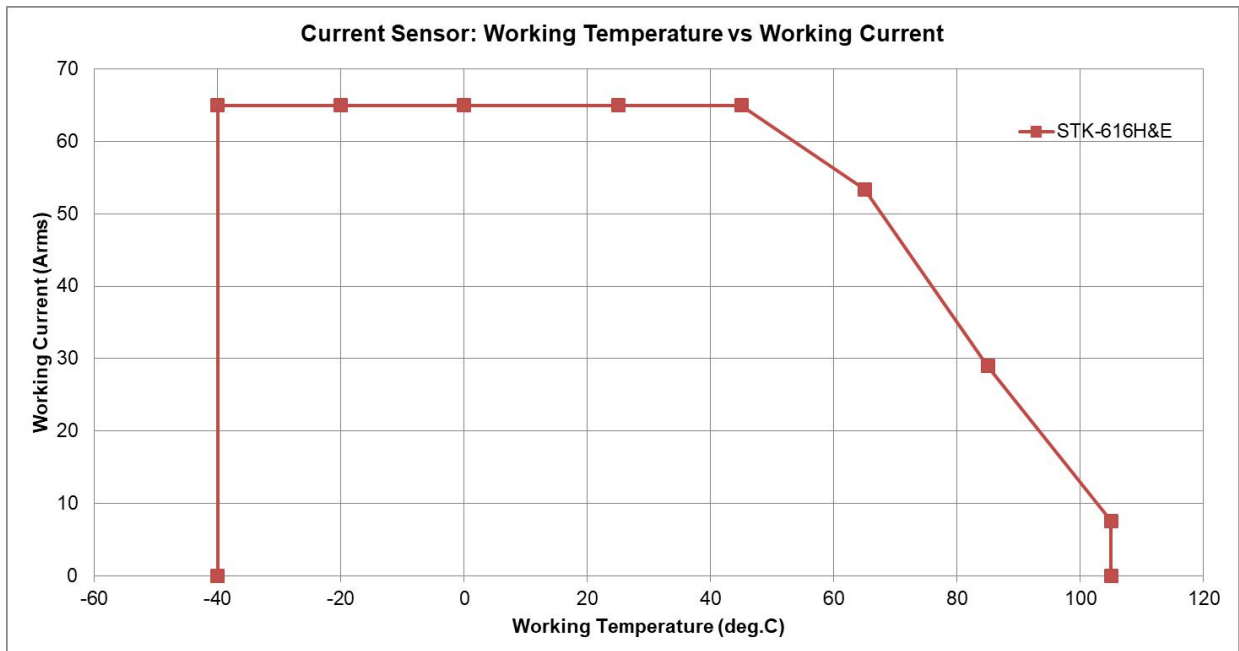


6. Typical Application of STK-616E

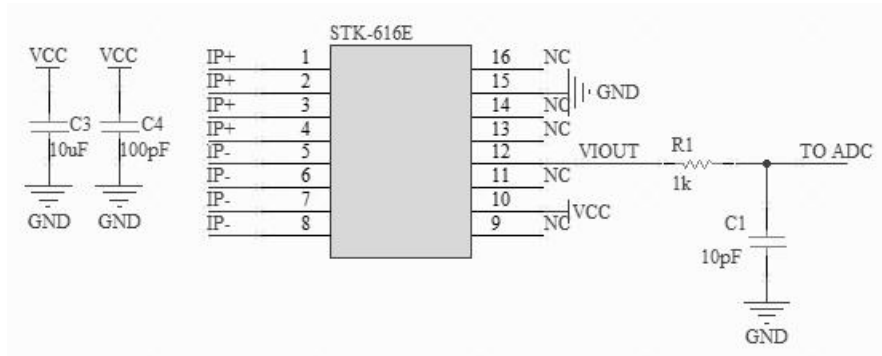


R1 (kohm)	C1 (pF)	Theoretical -3dB $f = 1/(2\pi RC)$ (kHz)	Measured -3dB (kHz)
20	81	98	~ 100
20	810	10	~ 10

The frequency characteristics of STK_616 series current sensor are not affected by the R-C setting (according to recommended R-C setting), therefore the active filter circuit or R-C circuit can be applied to modulate the sensor's frequency characteristics.

7. Frequency band width

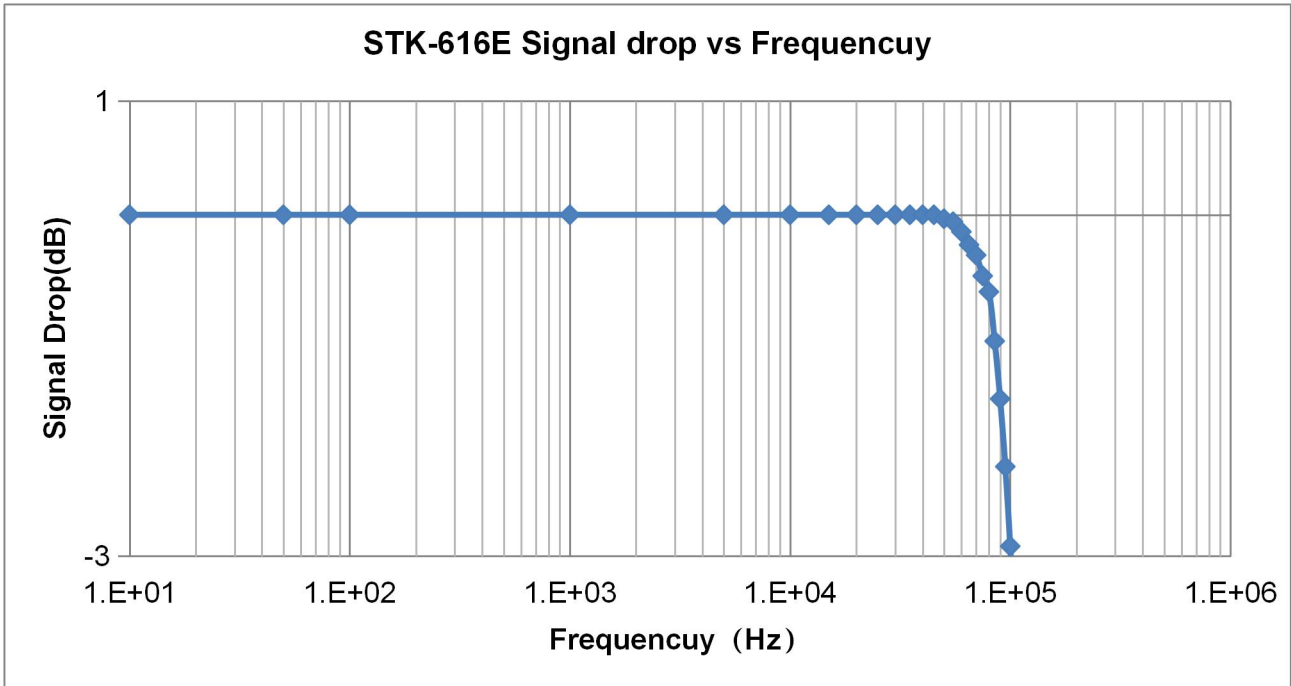

8. Response time & noise with typical circuit

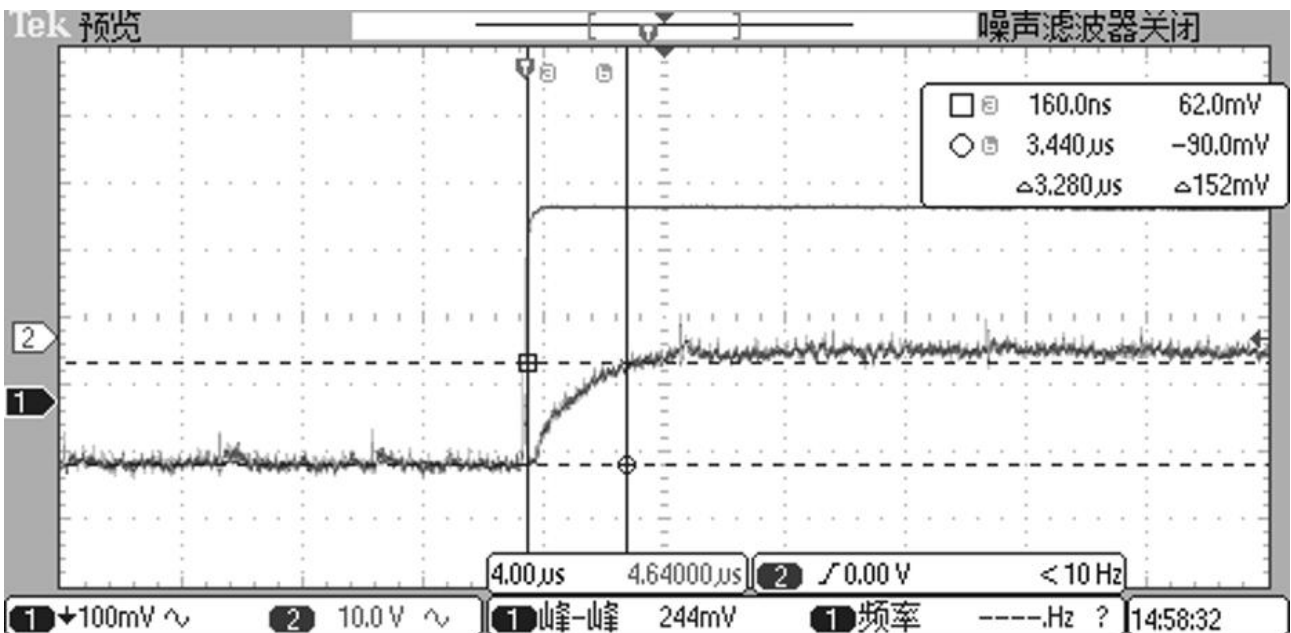

Response time of ~ 3.5 μs can be achieved.