



FEATURES :

- * 6 x 30mm Glass Tube, PSE Class B Normal Blow Type
- 61NR / 62NR : Fast-Acting (Normal Blow)
- 61ST / 62ST : Medium Time-Lag Type
- * RoHS-Compliant Products

APPROVALS :


- * METI (PSE) [1A-15A 125V/250V]
- * KC [61NR / 62NR: 100mA-15A 250V]




61NR/62NR, 61ST/62ST SERIES

DIMENSIONS :

61NR
61ST



62NR
62ST

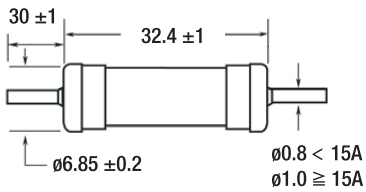


Unit : mm

ELECTRICAL CHARACTERISTICS :


% of Ampere Rating	Opening Time
130%	1 hours Min.
160%	1 hour Max.
200%	2 sec Max.

AVERAGE TIME CURRENT CURVES :

61NR / 62NR TYPICAL

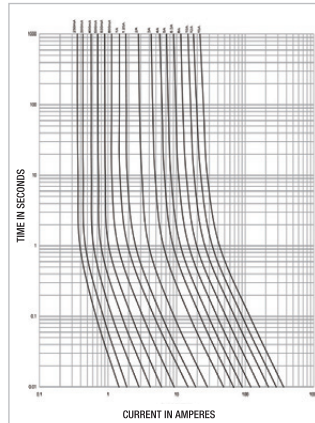

61ST / 62ST TYPICAL

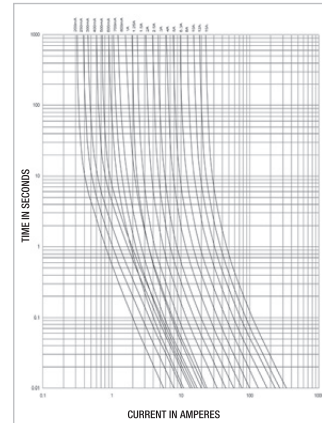

SPECIFICATIONS :

Product Code 61NR / 62NR	Product Code 61ST / 62ST	Ampere Rating	Voltage Rating H / L	Product Code 61NR / 62NR	Product Code 61ST / 62ST	Ampere Rating	Voltage Rating H / L
61NR / 62NR 0250H/L	61ST / 62ST 0250H/L	250 mA	250V / 125V	61NR / 62NR 016H/L	61ST / 62ST 016H/L	1.6 A	250V / 125V
61NR / 62NR 0300H/L	61ST / 62ST 0300H/L	300 mA	250V / 125V	61NR / 62NR 020H/L	61ST / 62ST 020H/L	2 A	250V / 125V
61NR / 62NR 0315H/L	61ST / 62ST 0315H/L	315 mA	250V / 125V	61NR / 62NR 025H/L	61ST / 62ST 025H/L	2.5 A	250V / 125V
61NR / 62NR 0350H/L	61ST / 62ST 0350H/L	350 mA	250V / 125V	61NR / 62NR 030H/L	61ST / 62ST 030H/L	3 A	250V / 125V
61NR / 62NR 0375H/L	61ST / 62ST 0375H/L	375 mA	250V / 125V	61NR / 62NR 032H/L	61ST / 62ST 032H/L	3.15 A	250V / 125V
61NR / 62NR 0400H/L	61ST / 62ST 0400H/L	400 mA	250V / 125V	61NR / 62NR 035H/L	61ST / 62ST 035H/L	3.5 A	250V / 125V
61NR / 62NR 0500H/L	61ST / 62ST 0500H/L	500 mA	250V / 125V	61NR / 62NR 040H/L	61ST / 62ST 040H/L	4 A	250V / 125V
61NR / 62NR 0600H/L	61ST / 62ST 0600H/L	600 mA	250V / 125V	61NR / 62NR 050H/L	61ST / 62ST 050H/L	5 A	250V / 125V
61NR / 62NR 0630H/L	61ST / 62ST 0630H/L	630 mA	250V / 125V	61NR / 62NR 060H/L	61ST / 62ST 060H/L	6 A	250V / 125V
61NR / 62NR 0700H/L	61ST / 62ST 0700H/L	700 mA	250V / 125V	61NR / 62NR 063H/L	61ST / 62ST 063H/L	6.3 A	250V / 125V
61NR / 62NR 0750H/L	61ST / 62ST 0750H/L	750 mA	250V / 125V	61NR / 62NR 070H/L	61ST / 62ST 070H/L	7 A	250V / 125V
61NR / 62NR 0800H/L	61ST / 62ST 0800H/L	800 mA	250V / 125V	61NR / 62NR 080H/L	61ST / 62ST 080H/L	8 A	250V / 125V
61NR / 62NR 010H/L	61ST / 62ST 010H/L	1 A	250V / 125V	61NR / 62NR 090H/L	61ST / 62ST 090H/L	9 A	250V / 125V
61NR / 62NR 012H/L	61ST / 62ST 012H/L	1.2 A	250V / 125V	61NR / 62NR 100H/L	61ST / 62ST 100H/L	10 A	250V / 125V
61NR / 62NR 013H/L	61ST / 62ST 013H/L	1.25 A	250V / 125V	61NR / 62NR 120H/L	61ST / 62ST 120H/L	12 A	250V / 125V
61NR / 62NR 015H/L	61ST / 62ST 015H/L	1.5 A	250V / 125V	61NR / 62NR 150H/L	61ST / 62ST 150H/L	15 A	250V / 125V

* Voltage Rating : H - 250VAC / L - 125VAC

* Interrupting Rating : 100A 125VAC (61NR/61ST : 1-15A)
(PSE) 500A 125VAC (62NR/62ST : 1-15A)

100A 250VAC (61NR/61ST : 1-15A)
100A 250VAC (62NR/62ST : 1-15A)
(eK KTL) 100A 250VAC (61NR/62NR : 100mA-15A)

6x30 mm GLASS BODY MINIATURE FUSE